



Bundled with two exclusive software programs

Professional sign making software

Fine Cut 8

Fine Cut 8, plug-in cutting software for Illustrator CS6 and CorelDRAW, is included. It helps to achieve highly sophisticated requirements such as contour cutting, production of cutting data from the graphic data, tiling and nesting.



Easy-to-operate cutting software

Simple Cut

User friendly SimpleCut enables beginners to use the cutting plotters easily. It provides easy text layouts as well as graphic creations and edits. Print image can be divided into blocks for making wide and large format signage. The software is also compatible with the following data file types: BMP, TIFF, JPEG, AI, EPS, WMF, EMF, MDX.

Specifications

Item	CG-60SRIII	CG-100SRIII	CG-130SRIII
Acceptable sheet width	90-740 mm	90-1,250 mm	90-1,550 mm
Effective cutting area	606 mm	1,070 mm	1,370 mm
Maximum speed	Cutting: 70 cm/s, Moving: 100 cm/s		
Adjustable speed range	1 - 10 cm/s (1 cm/s step adjustment), 1 - 70 cm/s (5 cm/s step adjustment)		
Mechanical resolution	X direction: 2.5 µm, Y direction: 5 µm		
Command resolution	25 µm or 10 µm (MGL-IIC) / 100 µm, 50 µm (MGL-Ic1)		
Repeatability*1	± 0.2 mm / 2 M		
Effective Repeatability*2	586 mm × 2 M	1,050 mm × 2 M	1,350 mm × 2 M
Maximum pressure	500g		
Range of down pressure	Cutter	10 - 20 g(2 g step), 20 - 100 g(5 g step), 100 - 500g(10g step)	
	Pen	10 - 20 g(2 g step), 20 - 100 g(5 g step), 100 - 150g(10 g step)	
Acceptable sheet*2	Vinyl sheet, Fluorescent type vinyl sheet, Reflective sheet, Rubber sheet		
Acceptable tool*3	Cutter, Ball-point pen		
Type of command	MGL-IIC / MGL-Ic1		
Interface	USB2.0, RS-232C, Ethernet		
Receiver buffer size	27 MB Standard (When sorting, 17 MB)		
Operational environment	5 - 35 °C, 35 - 75 % (Rh), Non-condensation		
Power requirement	AC 100 V - 240 V, 145 VA or less		
Dimensions (W x D x H)	1,030 × 430 × 335 mm (1,030 × 430 × 1,185 mm)*4	1,530 × 580 × 1,150 mm	1,830 × 580 × 1,150 mm
Weight	24kg	41kg	46kg
Stand	Optional equipment	Standard equipment	Standard equipment

*1 Except for media expansion and contraction due to temperature.

*2 Operated with Mimaki specified media, cutter and cutting conditions. Thickness of rubber and its cutting speed are limited.

Guaranteed accuracy environment: Temperature 12-25°C, Humidity 45-65%

*3 Our dedicated cutter blade and specified commercial ball-point pens are available. (Drawing quality of ball-point pen is not warranted)

*4 When equipped with the optional stand (OPT-C0231)

Supplies & Options


Item	Quantity	Item-No
Standard blade for vinyl	3	SPB-0030
Blade for vinyl	3	SPB-0001
Blade for small character	3	SPB-0003
Blade for reflective sheet	2	SPB-0006
Blade for fluorescent sheet	3	SPB-0007
APC blade set (rubber sheet)	3	SPB-0082
Cutter holder	1	SPA-0090
Pen adaptor	1	SPA-0169
Stand for CG-60	1	OPT-C0231
Sheet basket 60	1	OPT-C0234
Sheet basket 100	1	OPT-C0232
Sheet basket 130	1	OPT-C0233
Roll shaft 100	1	OPT-C0223
Roll shaft 130	1	OPT-C0224



CUTTING PLOTTER CG-SR III Series CG-60/100/130SR III



The perfect cutting tool for every job ...

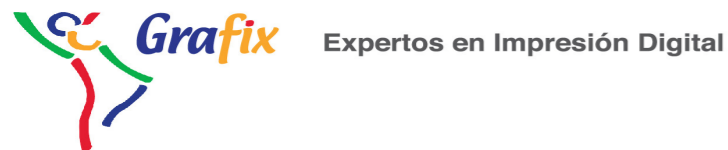

Publicidad y Textil

servicio@grafix.com.co

Tel.: (571) 611 47 64, Cra 11A No. 93A-62 Of. 201.

www.grafix.com.co, Bogotá, Colombia.



SIGN &
GRAPHICS

Mimaki

The world imagines... Mimaki delivers